


Definitions of Mux Parameters

Our components fulfill or exceed standard market specifications for optical components. It may still not be entirely obvious how different parameters like isolation are more closely defined.

The following diagram illustrates the most important parameters, following the "green box model", in accordance with ITU. The channel, including its bandwidth and isolation as defined by the component specifications, delineates a box. The measured transmission spectrum of each channel has to be above the box.

Under no circumstances can it interfere with any neighboring box (channel). Therefore, isolation and insertion losses have to be maintained within the borders set out by the defined center wavelengths and bandwidth.

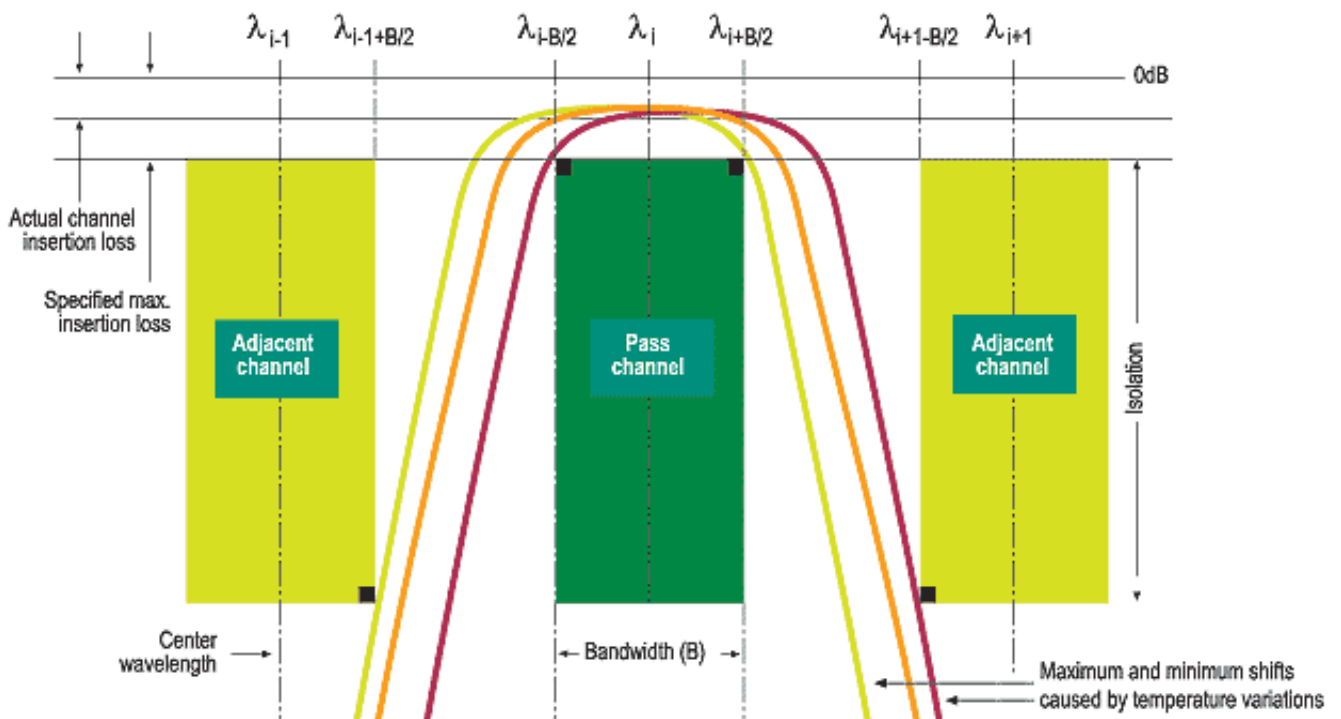

HUBER+SUHNER Cube Optics AG
is certified according to ISO 9001.

WAIVER

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

HUBER+SUHNER Cube Optics AG
Robert-Koch-Strasse 30
55129 Mainz
Germany

phone: +49-6131-69851-0
fax: +49-6131-69851-79
sales.cubo@hubersuhner.com

www.hubersuhner.com
www.cubeoptics.com